### Woodland Public Schools

Facilities and Safety Report November 2017

#### **FACILITIES REPORT**

<u>Holiday Shutdown Planning</u> In addition to our standard annual cleaning activities, maintenance, custodial, grounds and contractors will be completing the following work. Below is a brief summary and schedule of these items.

- Storm Drains and Drywells, 12/21 Clean out storm drains at 3 schools, clear drywell between WPS and WMS, locate and clean drywell by business office.
- Replenish EWF, WPS and WIS (schedule pending delivery availability) – Add Engineered Wood Fibers to WIS, WPS main and alternate playground areas to meet fall protection standards
- Locks WMS (schedule pending availability) Start blanking exterior doors and change exterior keys at WMS to enhance school security
- HEPA install Ceramics lab Installation of two Fan Filter Units (FFU's) to reduce ceramic particulate in classroom environment and create a healthier environment

- Annual SWCAA boiler testing 12/26 Complete annual stack testing and annual Southwest Clean Air Agency compliance inspections and reports
- Resurface Green Gym floor 12/20–12/23 Install new water based finish coat to gym floor
- Electrical repairs 12/18 -12/22 Install permanent conduit where extension cords have been used, wire in new FFU's WHS, and miscellaneous other electrical jobs to support other repairs and shutdown activities
- House tear down 2280 Lewis River Rd 12/18 –
  12/23 Demo house next to WIS, clear site of
  vegetation, grade site, remove fences and lay
  crushed rock.

#### Facilities Report Continued


- Cameras WPS/WMS 12/18 12/29 Complete balance of Exterior cameras WIS, Repair 3 cameras WMS
- Chair rail wall WHS (in progress) -Repair area where chairs have been stored, install chair rail to protect newly repaired surface
- CNC to WHS (in progress)

   Move Mazak CNC
  (Computer Numerical Control) milling tool to WHS
  auto shop, relocate existing lathe, milling tool and
  tire balancer to accommodate new tool install.
- Wall and ceiling repairs WMS, WHS (In progress) -Ceiling green hall (2), bathroom and room 430.
   Stage area WHS

- Kitchen items 12/18 12/29 Repair wall WPS, maintenance on freezer WMS and hot line repair WHS
- Annual department training 12/19 OSHA
   occupational safety training for entire team, ladder,
   roof, hazcomm, etc.
- Installation of weather stations WHS, WMS to support Emergency planning activities
- Install remote communication box WHS stadium to support remote operation of field lighting controls
- Sidewalk install WPS, WHS 12/18-12/22 Install sidewalk to aid special Education students better egress to buses and island bridge WHS

#### FACILITY CHARTS - POWER COST AND WORK ORDER STATUS



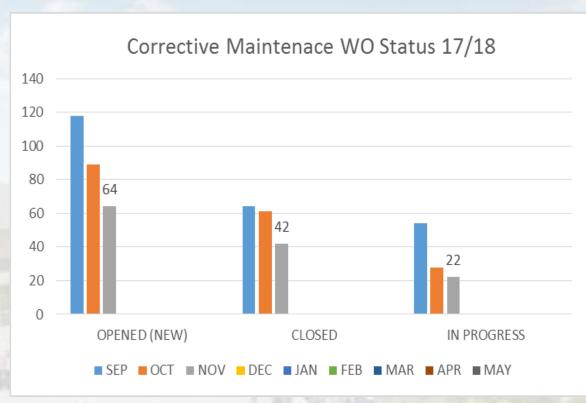

# FACILITY CHARTS – WATER USAGE WHS, WIS, WMS, WPS








The WMS chart has been reconfigured to include the following 7 meters: 755 park high and low flow, BO and Team High, Pit house, buss barn, athletic field and DO. All of these meters are totaled on the WMS graph but each data point is recorded separately to aid in identifying leaks.

## Water charts are updated every two Months, next update to these charts in January 2018

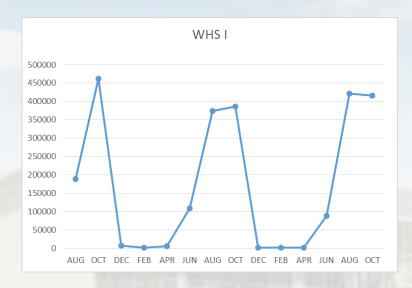



#### SAFETY REPORT

#### Accidents for the month

There were a total of 9 student injuries and 4 staff incidents/accidents

#### **Staff Accidents/Incidents**

- WPS Student behavior caused injury to IA (3 events)
- Yale One employee slipped on stairs

#### Student Accidents/Injuries (8)

- WPS Student pushed by another student injured rump
- WIS Student slipped on stair tread hit bottom
- WIS Student kicked ball lost footing and hit head on gym floor
- WIS Student slipped on portable ramp, scraped knee and hand
- WIS Closing blinds, student pulled to hard on rod and dislodged valance and struck arm
- WHS Students hair burnt by torch (careless handling)
- WHS Student rolled ankle during basketball, sprain
- WHS Students knee popped, fractured leg
- WHS Student missed bottom step, bruise and 2 minor abrasions

#### SAFETY CHARTS

